


CORRUGATED STEEL BRIDGE FORM (WITH FACTORY CLOSED ENDS)


1.5" DEEP X 6" PITCH BRIDGE FORM



PHYSICAL PROPERTIES


| 1.5" x 6" x 36" COVER – NS – G165 | | | | | |
|-----------------------------------|----------|-------|-------|-----------|--|
| Gauge | Design t | Sx | Ix | Wt. / Sq. | |
| 22 | 0.0299 | 0.165 | 0.140 | 180 | |
| 20 | 0.0359 | 0.216 | 0.178 | 213 | |
| 18 | 0.0478 | 0.305 | 0.262 | 278 | |
| 16 | 0.0598 | 0.390 | 0.350 | 343 | |
| Additional Concrete (in) | | | 0.: | 50 | |

All bridge form sheets are fabricated with steel melted and manufactured in the USA and conforming to ASTM A653 SS-Grade 50 min.

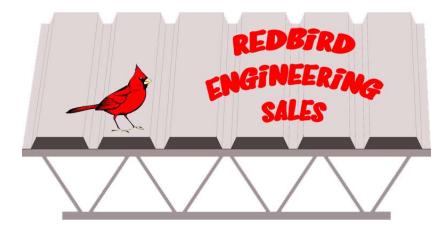

CORRUGATED STEEL BRIDGE FORM (WITH FACTORY CLOSED ENDS)


2" DEEP X 8.5" PITCH BRIDGE FORM



PHYSICAL PROPERTIES


| 2" x 8.5" x 34" COVER – G165 | | | | | |
|------------------------------|----------|-------|-------|-----------|--|
| Gauge | Design t | Sx | Ix | Wt. / Sq. | |
| 22 | 0.0299 | 0.276 | 0.328 | 178 | |
| 21 | 0.0329 | 0.305 | 0.367 | 195 | |
| 20 | 0.0359 | 0.334 | 0.403 | 211 | |
| 18 | 0.0478 | 0.446 | 0.537 | 281 | |
| 16 | 0.0598 | 0.556 | 0.673 | 348 | |
| Additional Concrete (in) | | | 0.2 | 73 | |

All bridge form sheets are fabricated with steel melted and manufactured in the USA and conforming to ASTM A653 SS-Grade 50 min.

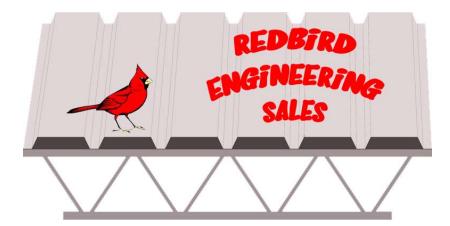

> CORRUGATED STEEL BRIDGE FORM (WITH FACTORY CLOSED ENDS)

2" DEEP X 9" PITCH BRIDGE FORM

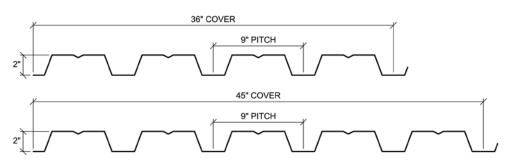

PHYSICAL PROPERTIES


| 2" x 9" x 36" OR 45" COVER – G165 | | | | | |
|-----------------------------------|----------|-------|-------|-----------|--|
| Gauge | Design t | Sx | Ix | Wt. / Sq. | |
| 22 | 0.0299 | 0.253 | 0.305 | 179 | |
| 21 | 0.0329 | 0.280 | 0.340 | 196 | |
| 20 | 0.0359 | 0.307 | 0.377 | 212 | |
| 19 | 0.0418 | 0.360 | 0.448 | 244 | |
| 18 | 0.0478 | 0.413 | 0.518 | 277 | |
| 16 | 0.0598 | 0.521 | 0.649 | 342 | |
| Additional Concrete (in) | | 0.67 | | | |

All bridge form sheets are fabricated with steel melted and manufactured in the USA and conforming to ASTM A653 SS-Grade 50 min.



CORRUGATED STEEL BRIDGE FORM (WITH FACTORY CLOSED ENDS)

2.5" DEEP X 8" PITCH BRIDGE FORM



PHYSICAL PROPERTIES


| 2.5" x 8" x 32" COVER – G165 | | | | | |
|------------------------------|----------|-------|-------|-----------|--|
| Gauge | Design t | Sx | Ix | Wt. / Sq. | |
| 22 | 0.0299 | 0.382 | 0.518 | 194 | |
| 21 | 0.0329 | 0.420 | 0.571 | 211 | |
| 20 | 0.0359 | 0.457 | 0.623 | 229 | |
| 18 | 0.0478 | 0.606 | 0.831 | 298 | |
| 16 | 0.0598 | 0.756 | 1.041 | 369 | |
| Additional Concrete (in) | | | 1. | 0 | |

All bridge form sheets are fabricated with steel melted and manufactured in the USA and conforming to ASTM A653 SS-Grade 50 min.



CORRUGATED STEEL BRIDGE FORM (WITH FACTORY CLOSED ENDS)

3" DEEP X 7.5" PITCH BRIDGE FORM



PHYSICAL PROPERTIES


| 3" x 7.5" x 30" COVER – G165 | | | | | |
|------------------------------|----------|-------|-------|-----------|--|
| Gauge | Design t | Sx | Ix | Wt. / Sq. | |
| 22 | 0.0299 | 0.495 | 0.889 | 241 | |
| 21 | 0.0329 | 0.547 | 0.991 | 263 | |
| 20 | 0.0359 | 0.600 | 1.094 | 285 | |
| 19 | 0.0418 | 0.703 | 1.281 | 328 | |
| 18 | 0.0478 | 0.809 | 1.466 | 371 | |
| 16 | 0.0598 | 1.020 | 1.838 | 459 | |
| Additional Concrete (in) | | | 0 | .90 | |

All bridge form sheets are fabricated with steel melted and manufactured in the USA and conforming to ASTM A653 SS-Grade 50 min.



CORRUGATED STEEL BRIDGE FORM (WITH FACTORY CLOSED ENDS)

3" DEEP X 8" PITCH BRIDGE FORM



PHYSICAL PROPERTIES


| 3" x 8" x 24" COVER- G165 | | | | | |
|---------------------------|----------|-------|-------|-----------|--|
| Gauge | Design t | Sx | Ix | Wt. / Sq. | |
| 22 | 0.0299 | 0.453 | 0.814 | 231 | |
| 21 | 0.0329 | 0.504 | 0.923 | 253 | |
| 20 | 0.0359 | 0.554 | 1.026 | 274 | |
| 19 | 0.0418 | 0.652 | 1.230 | 317 | |
| 18 | 0.0478 | 0.754 | 1.413 | 367 | |
| 16 | 0.0598 | 0.942 | 1.772 | 454 | |
| Additional Concrete (in) | | | 0. | 86 | |

All bridge form sheets are fabricated with steel melted and manufactured in the USA and conforming to ASTM A653 SS-Grade 50 min.



CORRUGATED STEEL BRIDGE FORM (WITH FACTORY CLOSED ENDS)

4.5" DEEP X 12" PITCH BRIDGE FORM

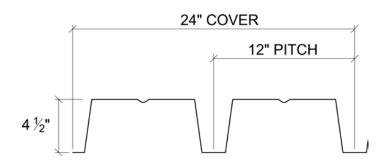

PHYSICAL PROPERTIES

| 4.5" x 12" x 24" COVER – G165 | | | | |
|-------------------------------|----------|-------|-------|-----------|
| Gauge | Design t | Sx | Ix | Wt. / Sq. |
| 20 | 0.0359 | 0.717 | 1.937 | 287 |
| 19 | 0.0418 | 0.852 | 2.378 | 330 |
| 18 | 0.0479 | 0.989 | 2.816 | 374 |
| 17 | 0.0538 | 1.119 | 3.226 | 417 |
| 16 | 0.0598 | 1.253 | 3.650 | 461 |
| Additional Concrete (in) | | | 0.9 | 92 |

All bridge form sheets are fabricated with steel melted and manufactured in the USA and conforming to ASTM A653 SS-Grade 50 min.